



Budenberg



Made in Britain

Unit B2, Stuart Road,
Altrincham Business Park,
Altrincham WA14 5GJ,
United Kingdom.

budenberg.co.uk
sales@budenberg.co.uk
+44 (0)161 777 7300

Model: 15L

The model 15L is manufactured to meet the demand for small high quality gauges designed for applications using gases, water or any liquid that does not attack brass, bronze or Beryllium copper

The one piece polycarbonate case with integral window forms a solid baffle in front of the Bourdon tube and incorporates a full diameter stainless steel blow-out back so that in the event of a tube failure through corrosion, explosion or gross over pressure any vapour or debris is vented from the back of the case.

This gauge is designed for direct mounting on to the process pipe work and comes with a grey inner sleeve to give a grey colour to the side of the case.

For oxygen applications these gauges must be manufactured to ensure they are entirely free from oil and grease.

Size

63 mm & 80mm Dial diameter

Mounting

Direct

Case & Bezel

One Piece Polycarbonate, Safety Pattern case

Scale Ranges

0 to 25 mBar, up to 600 mBar Pressure
Equivalent units of pressure / vacuum available
Including Inches and mm of Water or Mercury
Single and dual scales are available

Pressure Element

Beryllium Copper Capsule, which gives the energy and precision required for accurate repeatable low pressure measurement

Overload

115%

Pressure Connection

1/4" BSP as Standard
1/8", 1/4" & 3/8" BSP & NPT are also available

Accuracy Class

CL:1 1.0% of FSD as defined in EN837-1

Temperature

Operating: -20 to +90 °C
Storage: -40 up to +100 °C
Options: for lower or higher operating temperatures, please contact our Sales Office

Temperature Effect

Variation in indication caused by temperature shall not exceed $\pm 0.04 \times (t_2 - t_1)\%$ of the span where:
t1 is the reference ambient temperature in degrees Celsius
t2 is the ambient temperature in degrees Celsius

SMALL DIAL - LOW PRESSURE INDUSTRIAL SERVICE GAUGE



Dial

White Anodised Aluminium marked in black finish
Option: Dual scale, colour bands & sectors
Customisation with Company Name & Logo also available

Pointer

Stainless steel coloured black

Movement

Brass Construction
Option : Viscous Damped movement to overcome the effects of minor pressure pulsations and vibrations

Window

One Piece Polycarbonate

Environmental Rating

IP54 as defined in EN 60 529

Traceability

All instruments are individually calibrated and have an unique Serial Number printed on the dial. A Certificate of Conformity Traceable to National Standards is Supplied Free of Charge

Certification available


BS EN 10204 3.1B Material Certification
Point by Point Test Certificate

Safety

All units are manufactured to comply with EN 837-1, S3 specification and other regulatory standards including PED.

Installation instructions

Refer to EN 837-2

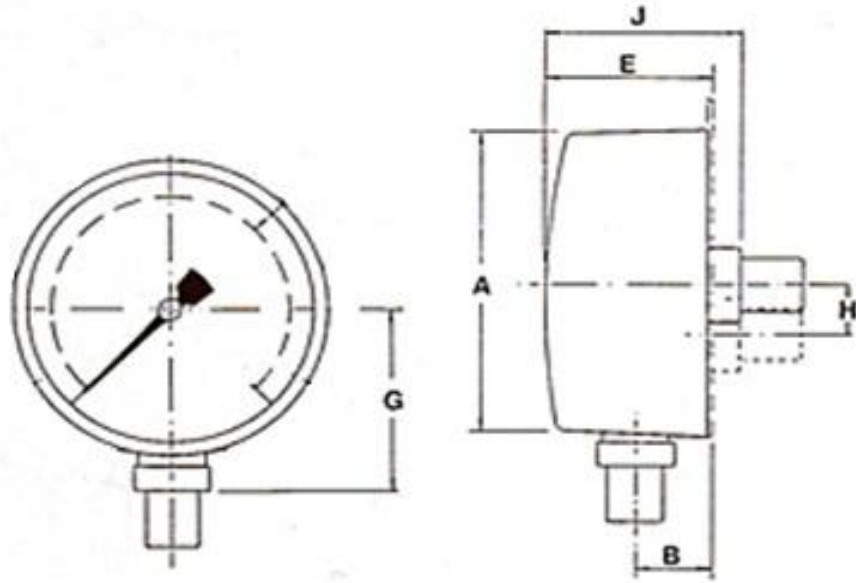

| Model No | A | B | E | F | G | Weight |
|-------------------------|------|------|--------|-------|--------|--------|
| 63mm Polycarbonate Case | 68mm | 14mm | 36.5mm | 110mm | 44.5mm | 0.2kg |
| 80mm Polycarbonate Case | 86mm | 19mm | 42mm | 153mm | 51.5mm | 0.3kg |

| Model No | H | J |
|-------------------------|--------|------|
| 63mm Polycarbonate Case | 13.5mm | 45mm |
| 80mm Polycarbonate Case | 13.5mm | 46mm |

Options

- Case : Customer Name or Logo
- Mounting : See other Datasheets for various mountings
- Threads : NPT available
- Dials : Colour sectors

Accessories

For high temperature applications such as steam, see our range of syphons and adaptors. – See separate Datasheet.
 Brass shut off cocks