

😸 🛛 Made in Britain

Unit B2, Stuart Road, Altrincham Business Park, Altrincham WA14 5GJ, United Kingdom. budenberg.co.uk sales@budenberg.co.uk +44 (0)161 777 7300

Model: CV

The Budenberg Check Valve was designed to meet the demand from applications where high pressures and arduous duties are standard. The valve permits gases and liquids to flow only in one direction, thus preventing the process flow from reversing.

The process flow in the desired direction opens the valve, and during the reverse flow the poppet is forced back into its seat closing the valve, which provides a total non-return of flow or pressure.

The poppet-check design of our valve utilises a spring loaded poppet resting in a seat ring as the closure element. It incorporates a heavy duty spring for repeatability and a prolonged life.

These Check Valves are also known in different industries as "Non-Return" and "Directional Control" valves.

Material

Body – 316 Stainless Steel as standard Spring – 316 Stainless Steel Other materials available on request.

Connection Size

¼" NPT Female / Female
½" NPT Female / Female
¾" NPT Female / Female
Adaptors available for other thread configurations

Pressure Ranges 6,000 Psi – As standard 10,000 Psi – Optional

Mounting Inline

Seals Viton

NON - RETURN CHECK VALVE HIGH PRESSURE



Cracking Pressure Between 6 & 8 Psi

Testing 100% Pressure / Hydrostatically tested

Temperature Up to 190 Degrees Celsius


Traceability


Each valve is stamped with unique trace- code to enable us to trace back to the original mill certificate. Therefore when requested each batch can be supplied fully in accordance to EN 10204 3.1b

Options

Customer names etched on the body, special designs undertaken, please contact or Sales Office.

Dimensions

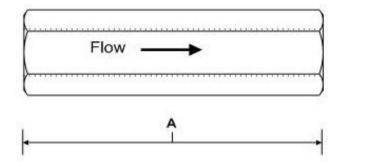



Model No	А	В
Check Valve	75mm	28mm

Accessories

Adaptors

We have a range of Parallel and Taper threaded adaptors to fit the Non-Return Check Valve - See Adaptors Datasheets

Valves

We have a range of Needle and Ball Valves that are complimentary to the Non-Return Check Valve - See Valve Datasheets

Applications

Pumping Systems - where a backflow of pressure can cause damage

Hydraulic cylinders - where a reduction in pressure can cause the hydraulic cylinder to withdraw

Vent Valve - to purge a system

Contamination prevention - where a backflow of pressure can cause contamination in analytical instrumentation System protection - where damage to solenoid valves, and tank overflows can occur when a backflow is not prevented